

01/04/00
jc662 U.S. PRO

Please type a plus sign (+) inside this box → ☒

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office. U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	IP 23
	First Inventor or Application Identifier	Wolfgang HILL
	Title	Electric Machine w/Soft-Magnetic Teeth and...
	Express Mail Label No.	

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231	
1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)	
2. <input checked="" type="checkbox"/> Specification [Total Pages 12] (preferred arrangement set forth below) <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies	
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 1]	ACCOMPANYING APPLICATION PARTS 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee) 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations] 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 13. <input checked="" type="checkbox"/> Small Entity Statement(s) [Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)] 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input checked="" type="checkbox"/> Other: Copy of German PCT application	
4. Oath or Declaration [Total Pages 2] <ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).		
* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).		
16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No. _____ / _____ Prior application information: Examiner _____ Group / Art Unit: _____ For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.		
17. CORRESPONDENCE ADDRESS <input type="checkbox"/> Customer Number or Bar Code Label [_____] or <input checked="" type="checkbox"/> Correspondence address below (Insert Customer No. or Attach bar code label here)		
Name: Wolfgang Hill		
Address: Ortenbergstr. 3		
City: 76135 Karlsruhe	State: _____ Zip Code: _____	
Country: Germany	Telephone: 49-721-861789 Fax: 49-721-861789	

Name (Print/Type)	Wolfgang Hill	Registration No. (Attorney/Agent)	
Signature	<i>W. Hill</i>	Date	12/22/1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

The PRO did not receive the following listed item(s) Post Card

jc584 U.S. PRO
09/477608

01/04/00

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR**

Docket Number (Optional)

IP 23

Applicant, Patentee, or Identifier: Wolfgang HILL

Application or Patent No.: _____

Filed or Issued: _____

Title: Electric Machine with Soft-Magnetic Teeth and a
Method for Producing the Same.

As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern, or organization exists.
☐ Each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

Wolfgang HILL

NAME OF INVENTOR

NAME OF INVENTOR

NAME OF INVENTOR

W. Hill

Signature of inventor

Signature of inventor

Signature of inventor

12/22/1999

Date

Date

Date

Certificate of Mailing under 37 CFR 1.8



I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to:

Assistant Commissioner for Patents
Washington, D.C. 20231

on 12/30/1999
Date

Christel Myers
Signature
Christel Myers
Typed or printed name of person signing Certificate

Note: Each paper must have its own certificate of mailing, or this certificate must identify each submitted paper.

TITLE**ELECTRIC MACHINE WITH SOFT MAGNETIC TEETH
AND A METHOD FOR PRODUCING THE SAME****BACKGROUND OF THE INVENTION****1. Field of the Invention**

This is a continuation of International Application PCT/DE98/01826, with an international filing date of July 2, 1998, and with priority of the German application 197 28 172.9, filed on July 2, 1997, now abandoned.

The invention concerns an electric machine with soft magnetic teeth at the air gap surface and a production process for such a machine.

2. Description of Prior Art

Electric machines with soft magnetic teeth at the air gap surface are known in a diversity of designs under the name of "step motor" or "switched reluctance machine". The toothing causes the magnetic resistance of the magnetic flux, which flows through the air gap, to change as the rotor is moving. The utilizable forces depend on the tooth geometry, the magnetizability of the soft magnetic material, and the flux density in the air gap.

One design which is distinguished by its simple winding technique is the transversal flux machine. The soft magnetic body has gaps in circumferential direction that correspond to approximately one half of the pole width. The current flowing in the conductor ring can generate only a weak magnetic field in said gaps so that these circumferential sections contribute more to power loss than to useful performance.

From DE 43 25 740 C1, a transversal flux machine is known in which U-shaped soft magnetic cores are arranged

around the conductor ring, the tangential width of said soft magnetic cores increasing disproportionately as the radius of the conductor ring increases. This results in gaps in circumferential direction between the radially inner ends of the cores which are wider than the width of the cores themselves.

In DE-OS 28 05 333 and DE 40 40 116 C2, segmented soft magnetic bodies are described in which the layering of the tooth cores is effected perpendicular to the layering of the yoke sheets.

From DE 34 14 312 A1, a permanent magnet excited machine with groups of electromagnets is known where the electromagnets have non-wound half-poles on both ends in direction of movement. The phase offset is generated by a gap between the electric pole units. The poles and half-poles have pole shoes which, with a plane air gap surface, provide only tight groove slots for inserting the wire winding. The ferromagnetic circuit of the electromagnet groups is made as a unit.

Furthermore, from DE 42 41 085 A1 is known the attachment of pole shoes to pole cores by means of dovetailing.

The objective of the present invention is, therefore, to advance a machine that is functioning in accordance with the reluctance principle in such a manner that, at reasonable production costs, the torque-to-bore volume ratio in relation to the air gap surface is increased and the ohmic and magnetic losses are decreased.

SUMMARY OF THE INVENTION

According to the invention, this objective is achieved in accordance with the characteristics of claims 1 and 6.

According to the invention, the soft magnetic teeth which define the air gap surface consist of a material that, compared to the remaining soft magnetic body, provides a higher flux density at the same magnetic field strength and/or a higher magnetic saturation flux density. Preferably, grain oriented electric sheet or a cobalt-iron alloy is used for the teeth.

In order not to impair the power increasing effect, the total cross section of the remaining soft magnetic body in direction of the magnetic flux is larger than the sum of the tooth surfaces that border on the air gap.

Example: By utilizing a cobalt-iron alloy, the flux density in the teeth at equal current supply to the machine can be increased by up to 20% (2.3 T versus 1.9 T). With the air gap surface being equal or, respectively, in a machine of approximately equal size, the capacity of the machine increases by 44%.

Alternatively or complementary, the soft magnetic body in which the conductor coils are arranged consists of prefabricated pole segments which are made preferably of grain oriented electric sheet. Every other pole is non-wound and consists of two pole halves which are connected by a non-magnetic holding element. The number of teeth at the air gap surface of the spooled pole corresponds to twice the number of the teeth of a half-pole. The preferably T-shaped holding element consists of a material with low magnetic and electric conductivity and prevents the movement of the half-poles in direction of the magnetic flux in the air gap. The half-poles, on the other hand, fix the spooled pole element in its position.

This modular construction corresponds to the second basic idea of the invention and permits also the advantageous use of grain oriented material, thereby optimally utilizing

the good magnetizability in the air gap area and the machine area where the space must be shared by the conductor material and the ferromagnetic material. The increase of magnetic resistance which impairs the capacity of the machine occurs in the grain oriented pole segments at only approximately 1.9 T. On the other hand, the increase of magnetic resistance in not grain oriented electric sheet occurs already at 1.6 T. Only the novel segmentation - in comparison to the state of the art - of the wound body allows optimal utilization of the grain orientation in the groove area of the poles.

The higher flux density in the pole allows at a like air gap diameter and a like magnetic flux an enlargement of the groove width, and the additional groove space makes a decrease in winding losses possible. Additionally, the pole winding does not need to be threaded through a tight groove slot.

Example: Compared to a conventional machine where the pole core width equals the groove width in the middle of the groove area, the pole core width, at equal flux density in the air gap, can be increased by 15% by fabricating the pole segments from grain oriented electric sheet. Additionally, thanks to the more advantageous winding technique, the pole coil can be made with a 65% instead of a 50% space factor. In total, a 50% larger copper cross section surface per groove or, respectively, a decrease of winding losses of 33% is achieved.

Essential for this improvement is the segmentation of the wound soft magnetic body into spooled poles and non-spooled half-poles where the half-pole constitutes at least one tooth at the air gap surface. The spooled pole and the two half-poles connected to the same in the yoke area are a magnetic unit that is separated from adjacent identical

magnetic units by non-magnetic holding elements. The teeth of the half-poles separated by the holding element are more distant from each other in direction of the movement than the teeth within the magnetic unit and thereby generate a phase offset between adjacent magnetic units.

The non-magnetic holding elements avoid counteracting forces from undesirable leakage flux and thereby also increase the force density of the machine. The negative influence of the secondary air gap is largely avoided by pressing the pole segments together and by a distinct increase of the contact surface by means of a beveled cut. In addition, an increase of the magnetic resistance in the yoke area is avoided by keeping the thickness of the yoke in direction of the groove depth at 75% of the width of the spooled pole. The combination of the effects

- more advantageous magnetization due to grain oriented pole segments,
- compact winding technique of the pole coils,
- short flux paths and decoupling of the phases due to magnetically separated units,

results in a distinct increase of the power density.

Besides improved capacity and lower winding losses, the segmentation according to the invention reduces the complexity of the punching tools and the punching waste. Winding of the pole coils is simplified and the additional assembly expense due to the large number of prefabricated pole parts is justifiable when utilizing flexible automated assembly machinery. The segmentation of the double limb pole machine according to the invention is suitable for rotating designs with radial and axial air gap field as well as for linear drives.

Better space and material utilization in rotating machines, particularly in those with transversal flux

arrangement, is also achieved by the use of electric sheet with a differential thickness from end to end. Presently, electric sheet of constant thickness is used exclusively in the electrical engineering industry. In accordance with the third basic idea of the invention, the sheets are shaped in direction of their thickness prior, during or after punching. This is done preferably in a rolling step prior to punching, and the result is an electric strip with a trapezoidal cross section.

The trapezoidal strip can be used advantageously in transversal flux machines by arranging one complete layered iron ring from two different punched sheets around the conductor rings. The flux is concentrated in the teeth, which preferably consist of a cobalt-iron alloy, in the vicinity of the magnetically active air gap only. The use of electric laminations of trapezoidal cross section is also advantageous in radial and axial flux machines, particularly in intermediate stators or rotors.

BRIEF DESCRIPTION OF THE DRAWINGS

The drawings display advantageous embodiments of the invention.

Figure 1 shows a circumferential cutout from a cross section of a step motor with external rotor with pole shoe caps and a built up rotor ring.

Figure 2 shows one half of a cross section of a transversal flux machine with tooth inserts of a cobalt-iron alloy.

Figure 3 shows a cutout from the axial lateral view of the soft magnetic body of the transversal flux machine of Fig. 2.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Figure 1 shows a cutout from the cross section of a reluctance machine according to invention (1) which consists of six identical magnetic units (2) with four teeth (3) each. In the cutout, only one magnetic unit is shown which consists of a spooled pole segment (4) and two identical non-spooled half pole segments (5). Pole and half pole segments consist of axially stacked grain oriented electric sheet with the preferred direction in radial direction. The half poles have one tooth at the surface of the air gap (6). 24 stator teeth (3) are arranged opposite 26 tooth segments (7) of the rotor (8). The distance between the teeth (3) of adjacent half poles (5) is larger by $\frac{2}{3}$ of the tooth width compared to the distance of the teeth within a magnetic unit. The number of teeth per magnetic unit may be 4, 8, 12, 16 etc. (respectively $4 \times k$ with k being an integer), and the number of magnetic units may be any multiple of the number of phases.

So that the rotor teeth (7) do not generate increased magnetic resistance prior to the stator teeth (3), they are made of grain oriented electric sheet as well. On the other hand, the rotor ring (9) consists of electric sheet that is not grain oriented. The tangentially bundled laminations of the rotor teeth (7) have a slightly trapezoidal cross section. This cross section is achieved by using trapezoidal rolled electric strips. The strips are bundled into bars and pressed into a heated rotor ring. During cooling, the pressure of the rotor ring (9) onto the rotor teeth (7) increases, so that firm seating is guaranteed. In addition, the tangential space between the rotor teeth is filled with a mechanically stable insulation material (10) that contributes further to the stability.

In the stator, the space between adjacent teeth (3) of different magnetic units is occupied by the broad end of

the T-shaped holding element (11). The holding elements consist also of a non-magnetic material with low electric conductivity and high mechanical strength.

The pole coil (12) is spooled onto the pole segment (4) in a previous production step. In this step, a considerably higher space factor can be achieved by exact placement of the wire under tensile stress than by inserting the winding through the groove slot (13). Subsequently, the two adjacent half poles (5) are pressed on tangentially and preferably attached by gluing. The completely assembled magnetic unit (2) is now axially inserted into the preheated holding body (14). During cooling, the T-shaped holding elements (11) contract and thereby generate a prestress which stabilizes the three-piece soft magnetic body of the magnetic unit even at the high fluctuations of the magnetic normal force in the air gap. Additionally, the construction is being sealed after assembly. Complementary, a claw-shaped body (not shown) can engage in the grooves of the pole segments and thereby contribute to stabilization.

In Figure 2, a cut through one half of the cross cut of a two-phase transversal flux machine (15) is depicted. Smaller tooth inserts (17) of a cobalt-iron alloy are inserted into punched sheet (16) of not grain oriented electric sheet. In direction of movement, the rotor segments (18) which also consist of a cobalt-iron alloy, are always only faced by the tooth inserts (17) or recesses (19). On the other hand, punched sheet (16) encloses the conductor ring (20) over the entire circumference and the flux density, even at the maximal flux density (2.3 T) in the tooth inserts (17), is limited in the remaining soft magnetic body (21) to the favorable values with regard to stray power between 1.2 and 1.4 T. Because the conductor ring (20) is in tangential direction completely embedded on three sides by the soft magnetic body (21),

electric current can contribute evenly to the generation of a magnetic field over the entire length of the conductor. Only in critical contractions of the magnetic flux significantly more expensive highly permeable material is being used.

The proportion of the rotor segments and tooth inserts in terms of the weight of the soft magnetic body can be reduced to 10 ~ 20% by the design according to invention. The result is considerable savings of material costs at approximately equal capacity in comparison to a conventional machine that consists in its entirety of a cobalt-iron alloy.

The improvement in the transformation of electric energy into magnetic energy is achieved by the use of electric sheet of variable thickness. In Figure 3, it can be recognized how a gapless soft magnetic ring (21) can be produced by tangential stacking of electric sheet (22) with trapezoidal cross section.

Electric sheet with a trapezoidal cross section - as shown by the rotor teeth in Fig. 1 - can also be advantageously inserted into radial flux machines. Furthermore, electric sheet deformed in such a manner can be inserted into segmented axial flux machines for better utilization of space and, consequently, improvement of capacity.

In the space between the soft magnetic teeth, permanent magnets that function as magnetic barriers may also be inserted. The present invention is not limited to pure reluctance machines but also includes hybrid motors and hybrid generators which, in addition to the soft magnetic teeth at the air gap are equipped with short circuit windings or exciting windings.

CLAIMS

1. Electric machine with at least one magnetic circuit and at least two structural groups that are moveable against each other, that are separated from each other by an air gap, and that contain at least one soft magnetic body each, partial areas of the surfaces of said at least two structural groups that lie adjacent to the air gap having inhomogeneous properties with regard to the magnetic flux, wherein at least one said soft magnetic body has a component that is disposed near the air gap and consists of a material with higher magnetizability and/or higher saturation flux density than a part of said soft magnetic body that is disposed more distant from said air gap, said part belonging to the same said magnetic circuit.

2. Electric machine in accordance with claim 1, wherein at least one said soft magnetic body has teeth at said air gap, said teeth consisting of grain oriented electric sheet, and at least one other said part of said soft magnetic body, said part consisting of electric sheet that is not grain oriented.

3. Electric machine in accordance with claim 1, wherein at least one said soft magnetic body has teeth at said air gap, said teeth being made of a cobalt-iron alloy, and at least one other said part of said soft magnetic body, said part being made of another iron alloy.

4. Electric machine in accordance with claim 1, wherein at least one said soft magnetic body consists of electric sheet of variable sheet thickness.

5. Electric machine in accordance with claim 1, wherein in a rotating machine said soft magnetic body is stacked in tangential direction and the thickness of said sheet increases as the radius increases.

6. Electric machine with at least one magnetic circuit and at least two structural groups that are moveable against each other, that are separated from each other by an air gap, and that contain at least one soft magnetic body each, partial areas of the surfaces of said at least two structural groups that lie adjacent to the air gap having inhomogeneous properties with regard to the magnetic flux, wherein at least one said structural group contains at least two magnetic units that consist of a spooled pole segment and two non-spooled half pole segments, said half pole segments abutting at least one pole segment in the yoke area.

7. Electric machine in accordance with claim 6, wherein a T-shaped holding element is arranged between two adjacent said half pole segments, said holding element magnetically separating said magnetic units and preventing movement of said half pole segments it holds.

8. Process for the production of an electric machine in accordance with claim 1, wherein said electric sheet is deformed prior, during or after punching so that the thickness of said sheet varies.

9. Process for the production of an electric machine in accordance with claim 6, wherein said soft magnetic body of said pole segment is prefabricated independently from the other parts of said soft magnetic body, and after application of a core insulation medium is wound with a tensile stressed conductor wire, and said two non-spooled half poles are subsequently attached from opposite sides to said prefabricated spooled pole.

ABSTRACT

Electric machines operating according to the reluctance principle have toothed air gap surfaces between their moving and fixed parts. The magnetizability of these teeth directly affects the performance of the machine. According to the invention, the teeth projecting into the air gap consist of a material which in relation to the remaining soft-magnetic body presents better magnetizability and/or greater magnetic saturation flux density. This material is preferably a grain-oriented electric steel sheet or a cobalt/iron alloy. Alternatively or in addition thereto, the soft-magnetic body in which the conductor coils are positioned can be made entirely of a grain-oriented material by appropriate segmentation. In this case, every other pole is non-spooled and consists of two halves separated by a non-magnetic holding element. The use of steel sheets rolled at an angle also contributes to the improved utilization of space and material in rotating machines, especially in transverse flux machines. The characteristics of the construction provided for in the invention result in the production of little cutting waste and thus raise the performance of electric machines with soft-magnetic teeth at the air gap surface and reduce losses.

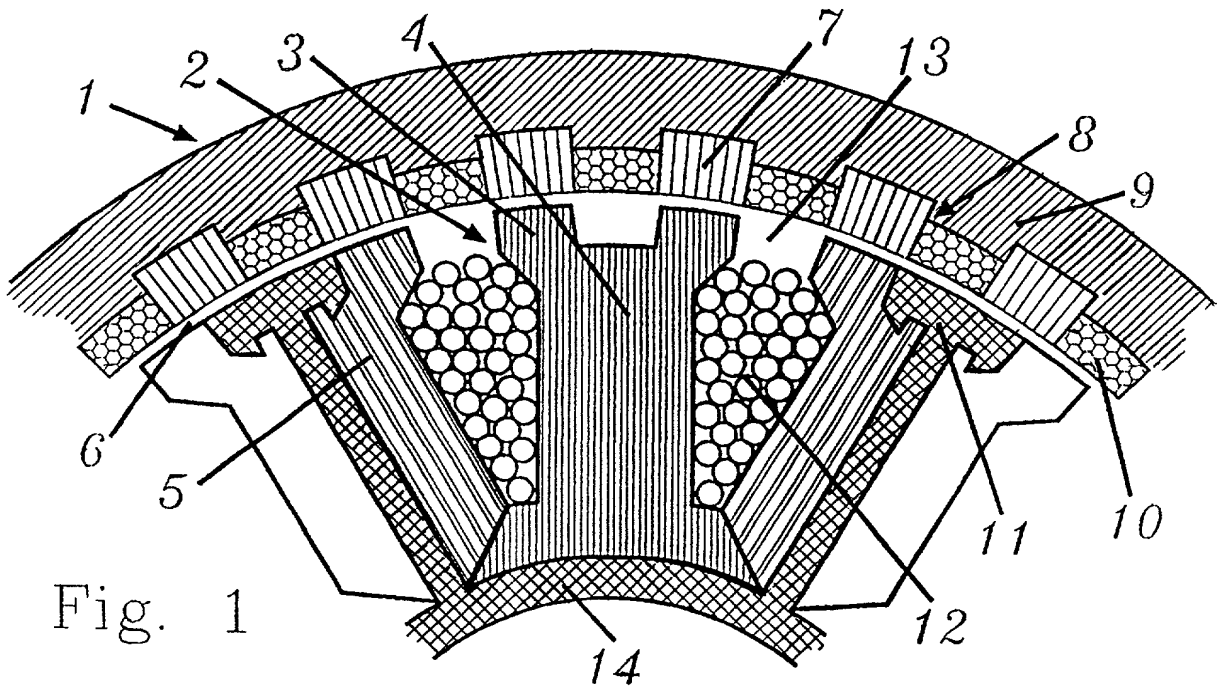


Fig. 1

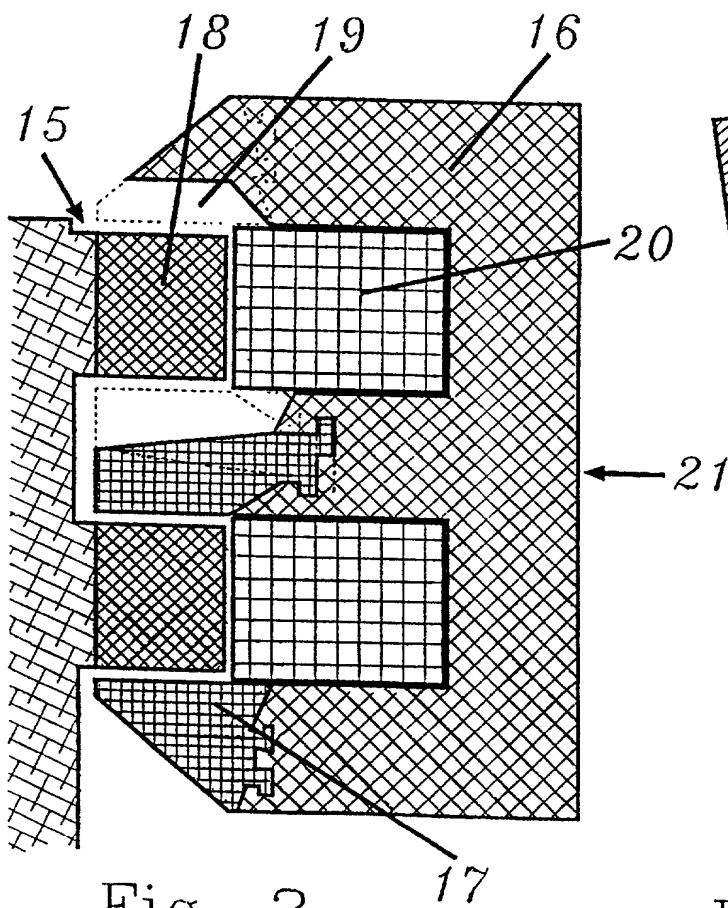


Fig. 2

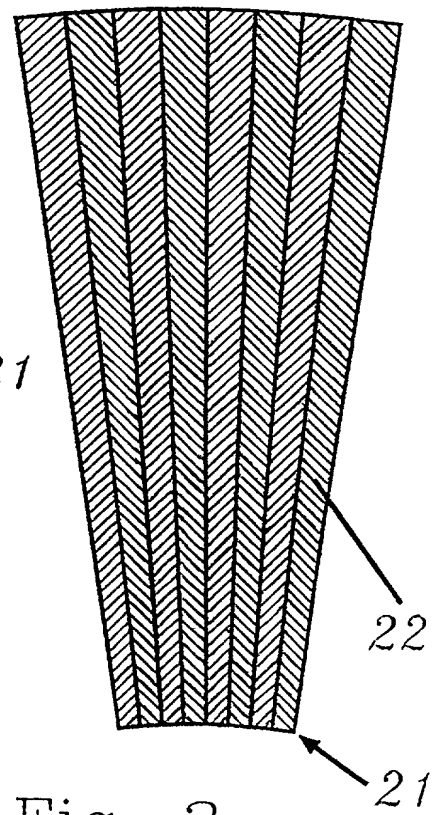


Fig. 3

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☒ Declaration Submitted with Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number	IP 23
First Named Inventor	Wolfgang HILL
COMPLETE IF KNOWN	
Application Number	/
Filing Date	
Group Art Unit	
Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Electric Machine with Soft-Magnetic Teeth
and a Method of Producing the Same.

the specification of which (Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
197 28 172.9 PCT/DE98/01826	Germany PCT	07/02/1997 07/02/1998	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/DE98/01826	07/02/1998	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto

Direct all correspondence to: ☐ Customer Number or Bar Code Label OR ☒ Correspondence address below

Name	Wolfgang Hill				
Address	Ortenbergstr. 3				
Address					
City	76135 Karlsruhe	State		ZIP	
Country	Germany	Telephone	49-721-861789	Fax	49-721-861789

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])		Family Name or Surname	
Wolfgang		Hill	
Inventor's Signature	12/22/99		Date
Residence: City	Karlsruhe	State	Country
			Germany
Post Office Address	Ortenbergstr. 3		
Post Office Address			
City	Karlsruhe	ZIP	76135
		Country	Germany

☐ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto